

# 6.3000: Signal Processing

## Two-Dimensional DFT


$$F[k_x, k_y] = \frac{1}{N_x N_y} \sum_{n_x=0}^{N_x-1} \sum_{n_y=0}^{N_y-1} f[n_x, n_y] e^{-j\left(\frac{2\pi k_x}{N_x} n_x + \frac{2\pi k_y}{N_y} n_y\right)}$$

$$f[n_x, n_y] = \sum_{k_x=0}^{N_x-1} \sum_{k_y=0}^{N_y-1} F[k_x, k_y] e^{j\left(\frac{2\pi k_x}{N_x} n_x + \frac{2\pi k_y}{N_y} n_y\right)}$$

## Simple Shapes

---


Find the 2D DFT of the following vertical bar.

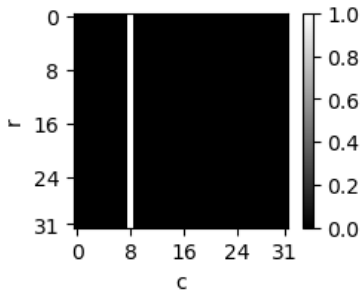

Array indices in numpy are  $[r, c]$ , where  $r$  is row and  $c$  is column. The image is  $32 \times 32$  pixels. The bar is at  $c = 8$ .

## Simple Shapes



Find the 2D DFT of the following vertical bar.

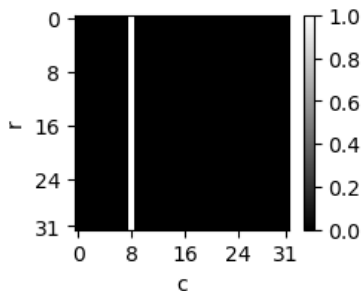

$$\begin{aligned} F[k_r, k_c] &= \frac{1}{RC} \sum_{r=0}^{R-1} \sum_{c=0}^{C-1} f[r, c] e^{-j\left(\frac{2\pi k_r}{R} r + \frac{2\pi k_c}{C} c\right)} \\ &= \frac{1}{32^2} \sum_{r=0}^{31} \sum_{c=0}^{31} \delta[c-8] e^{-j\left(\frac{2\pi k_r}{32} r + \frac{2\pi k_c}{32} c\right)} \\ &= \frac{1}{32} \sum_{r=0}^{31} e^{-j\frac{2\pi k_r}{32} r} \frac{1}{32} \sum_{c=0}^{31} \delta[c-8] e^{-j\frac{2\pi k_c}{32} c} = \delta[k_r] \frac{1}{32} e^{-j\frac{2\pi k_c}{32} 8} \end{aligned}$$

## Simple Shapes

Find the 2D DFT of the following vertical bar.

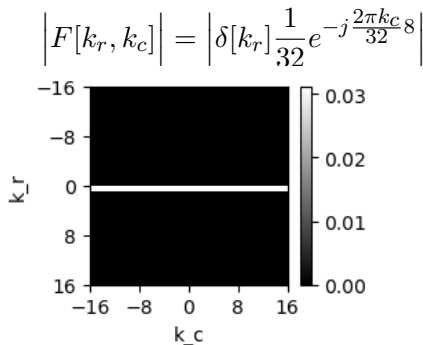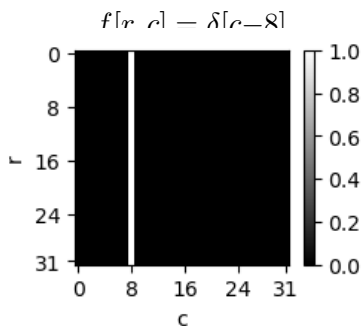

Frequency  $[k_r, k_c]$  is often plotted with the origin in the center.

How does the  $e^{-j \frac{2\pi k_c}{32} 8}$  term contribute to the right panel?


Could you change  $f[r, c]$  so that  $F[k_r, k_c] = \frac{1}{32} \delta[k_r]$ ? (no exponential)

Could you change  $f[r, c]$  so that the horizontal bar in  $F$  is at  $k_r = 8$ ?

## Simple Shapes

---


Find the 2D DFT of this image, where bars are at  $c=0$  and  $c=16$ .

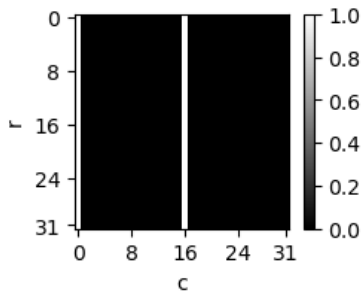

## Simple Shapes

---

Find the 2D DFT of this image, where bars are at  $c=0$  and  $c=16$ .


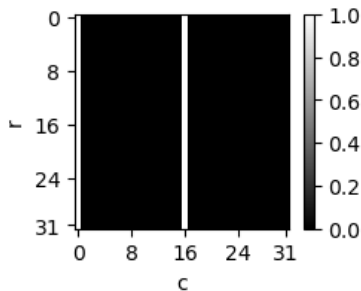


$$\begin{aligned}\delta[c] &\stackrel{\text{DFT}}{\implies} \frac{1}{32}\delta[k_r] \\ \delta[c]+\delta[c-16] &\stackrel{\text{DFT}}{\implies} \frac{1}{32}\delta[k_r] + \frac{1}{32}e^{-j\frac{2\pi k_c}{32}16}\delta[k_r] = \frac{1}{32}\left(1 + (-1)^{k_c}\right)\delta[k_r] \\ &= \begin{cases} \frac{1}{16} & \text{if } k_c \text{ is even and } k_r=0 \\ 0 & \text{otherwise} \end{cases}\end{aligned}$$

## Simple Shapes

---


Find the 2D DFT of this image, where bars are at  $c=0$  and  $c=16$ .

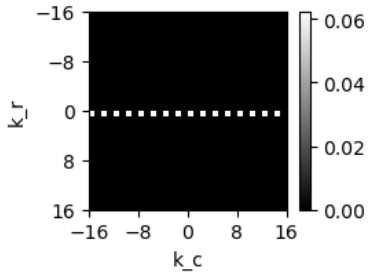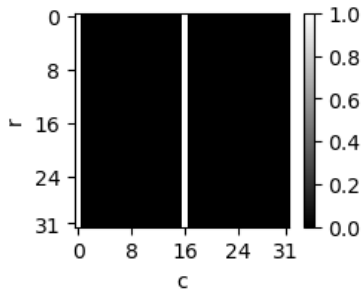

## Simple Shapes

---

Find the 2D DFT of the following image.

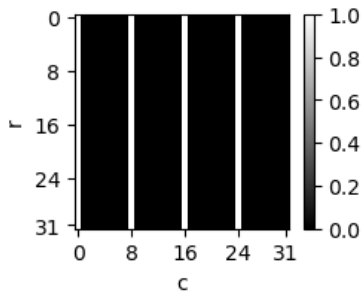




## Simple Shapes

---

Find the 2D DFT of the following image.


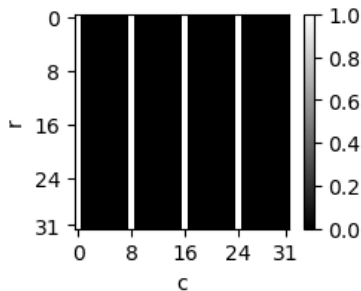


$$\begin{aligned}\delta[c] &\stackrel{\text{DFT}}{\implies} \frac{1}{32}\delta[k_r] \\ \sum_{m=0}^3 \delta[c-8m] &\stackrel{\text{DFT}}{\implies} \frac{1}{32}\delta[k_r] \sum_{m=0}^3 e^{-j\frac{2\pi kc}{C}8m} \\ &= \frac{1}{32}\delta[k_r] \sum_{m=0}^3 e^{-j\frac{2\pi kc}{4}m} = \frac{1}{8}\delta[k_r]\delta[k_c \bmod 4]\end{aligned}$$

## Simple Shapes

Find the 2D DFT of the following image.


$$\sum_{m=0}^3 \delta[c-8m] \xrightarrow{\text{DFT}} \frac{1}{8} \delta[k_r] \delta[k_c \bmod 4]$$

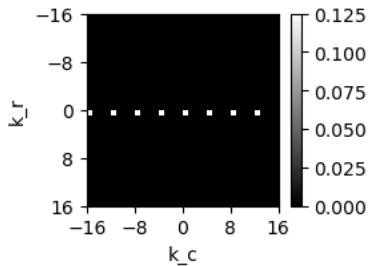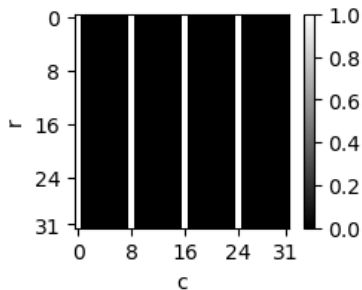

# Simple Shapes


---

Find the 2D DFT of the following image.

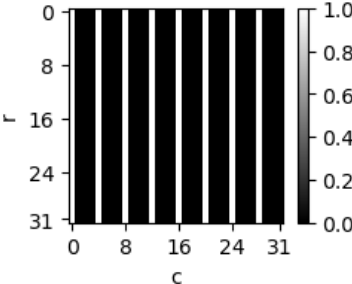

## Simple Shapes

Find the 2D DFT of the following image.


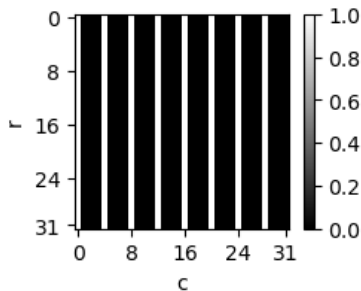


$$\begin{aligned} \delta[c] &\stackrel{\text{DFT}}{\Rightarrow} \frac{1}{32} \delta[k_r] \\ \sum_{m=0}^7 \delta[c-4m] &\stackrel{\text{DFT}}{\Rightarrow} \frac{1}{32} \delta[k_r] \sum_{m=0}^7 e^{-j \frac{2\pi k_c}{C} 4m} \\ &= \frac{1}{32} \delta[k_r] \sum_{m=0}^7 e^{-j \frac{2\pi k_c}{8} m} = \frac{1}{4} \delta[k_r] \delta[k_c \bmod 8] \end{aligned}$$

## Simple Shapes

---

Find the 2D DFT of the following image.

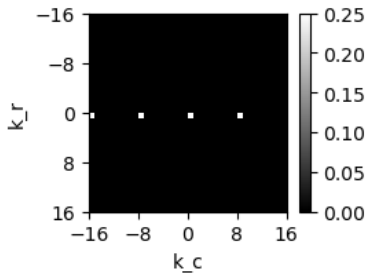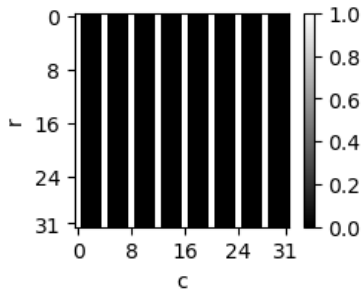

What's the relation between the period in space (left) and the period in frequency (right)?