6.3000: Signal Processing


Two-Dimensional DFT

$$F[k_x, k_y] = \frac{1}{N_x N_y} \sum_{n_x=0}^{N_x-1} \sum_{n_y=0}^{N_y-1} f[n_x, n_y]\, e^{-j\left(\frac{2\pi k_x}{N_x} n_x + \frac{2\pi k_y}{N_y} n_y\right)}$$

$$f[n_x, n_y] = \sum_{k_x=0}^{N_x-1} \sum_{k_y=0}^{N_y-1} F[k_x, k_y]\, e^{j\left(\frac{2\pi k_x}{N_x} n_x + \frac{2\pi k_y}{N_y} n_y\right)}$$

Simple Shapes


Find the 2D DFT of the following vertical bar.

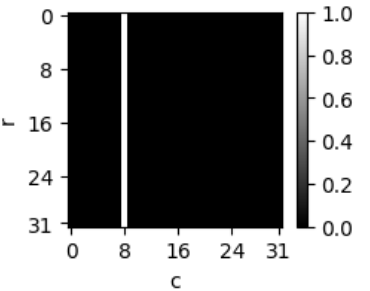

Array indices in numpy are `[r,c]`, where `r` is row and `c` is column.
The image is 32×32 pixels. The bar is at $c = 8$.

Simple Shapes

Find the 2D DFT of the following vertical bar.

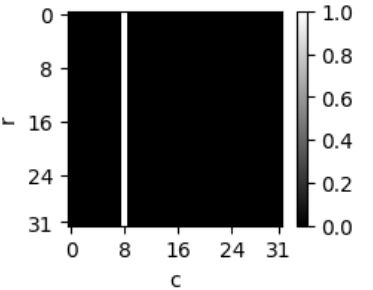


$$F[k_r, k_c] = \frac{1}{RC} \sum_{r=0}^{R-1} \sum_{c=0}^{C-1} f[r,c]\, e^{-j\left(\frac{2\pi k_r}{R} r + \frac{2\pi k_c}{C} c\right)}$$

$$= \frac{1}{32^2} \sum_{r=0}^{31} \sum_{c=0}^{31} \delta[c-8]\, e^{-j\left(\frac{2\pi k_r}{32} r + \frac{2\pi k_c}{32} c\right)}$$


$$= \frac{1}{32} \sum_{r=0}^{31} e^{-j\frac{2\pi k_r}{32} r} \frac{1}{32} \sum_{c=0}^{31} \delta[c-8] e^{-j\frac{2\pi k_c}{32} c} = \delta[k_r] \frac{1}{32} e^{-j\frac{2\pi k_c}{32} 8}$$

Simple Shapes

Find the 2D DFT of the following vertical bar.

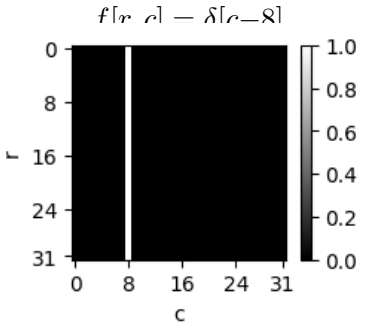

$$\left|F[k_r, k_c]\right| = \left|\delta[k_r]\frac{1}{32}e^{-j\frac{2\pi k_c}{32}8}\right|$$

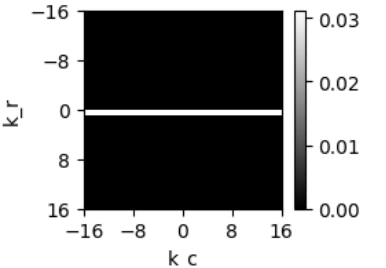

Frequency $[k_r, k_c]$ is often plotted with the origin in the center.


How does the $e^{-j\frac{2\pi k_c}{32}8}$ term contribute to the right panel?

Could you change $f[r, c]$ so that $F[k_r, k_c] = \frac{1}{32}\delta[k_r]$? (no exponential)

Could you change $f[r, c]$ so that the horizontal bar in F is at $k_r = 8$?


Simple Shapes

Find the 2D DFT of this image, where bars are at $c{=}0$ and $c{=}16$.

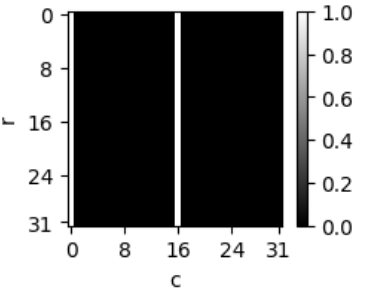

Simple Shapes

Find the 2D DFT of this image, where bars are at c=0 and c=16.

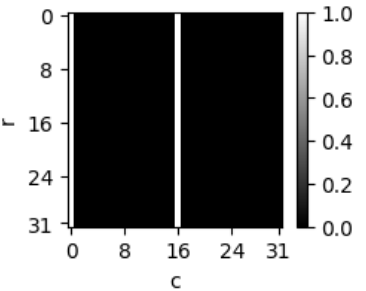


$$\delta[c] \quad \overset{\text{DFT}}{\Longrightarrow} \quad \frac{1}{32}\delta[k_r]$$


$$\delta[c]+\delta[c-16] \quad \overset{\text{DFT}}{\Longrightarrow} \quad \frac{1}{32}\delta[k_r] + \frac{1}{32}e^{-j\frac{2\pi k_c}{32}16}\delta[k_r] = \frac{1}{32}\left(1+(-1)^{k_c}\right)\delta[k_r]$$

$$= \begin{cases} \frac{1}{16} & \text{if } k_c \text{ is even and } k_r=0 \\ 0 & \text{otherwise} \end{cases}$$

Simple Shapes


Find the 2D DFT of this image, where bars are at c=0 and c=16.

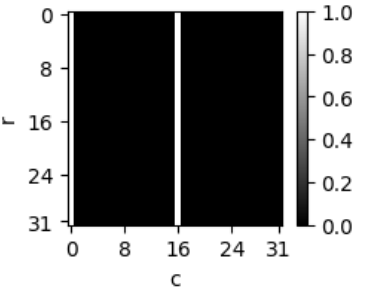

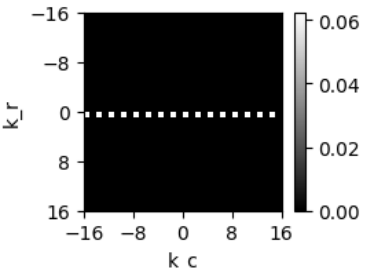


Simple Shapes

Find the 2D DFT of the following image.

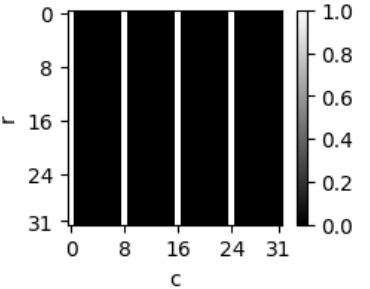

Simple Shapes

Find the 2D DFT of the following image.

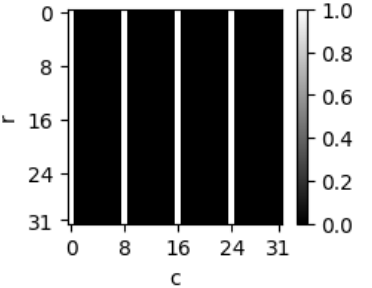

$$\delta[c] \quad \overset{\text{DFT}}{\Longrightarrow} \quad \frac{1}{32}\delta[k_r]$$


$$\sum_{m=0}^{3}\delta[c-8m] \quad \overset{\text{DFT}}{\Longrightarrow} \quad \frac{1}{32}\delta[k_r]\sum_{m=0}^{3}e^{-j\frac{2\pi k_c}{C}8m}$$


$$= \frac{1}{32}\delta[k_r]\sum_{m=0}^{3}e^{-j\frac{2\pi k_c}{4}m} = \frac{1}{8}\delta[k_r]\delta[k_c \bmod 4]$$

Simple Shapes

Find the 2D DFT of the following image.


$$\sum_{m=0}^{3} \delta[c-8m] \quad \overset{\text{DFT}}{\Longrightarrow} \quad \frac{1}{8}\delta[k_r]\delta[k_c \bmod 4]$$

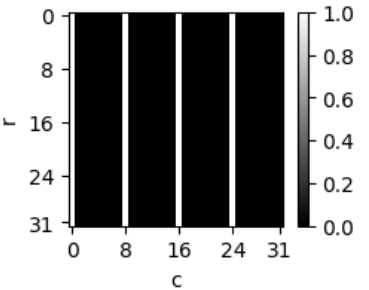

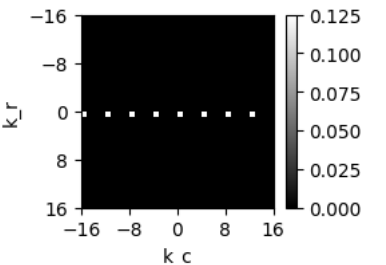


Simple Shapes

Find the 2D DFT of the following image.

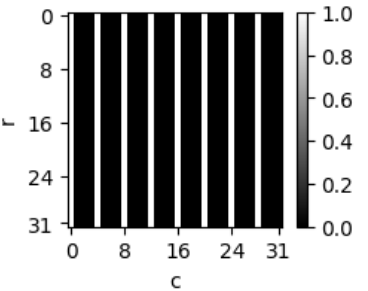

Simple Shapes

Find the 2D DFT of the following image.

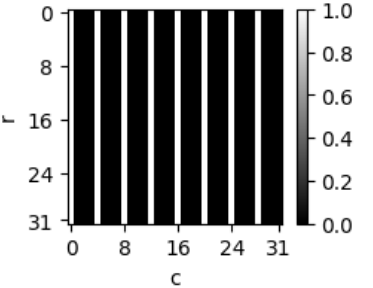


$$\delta[c] \quad \overset{\text{DFT}}{\Longrightarrow} \quad \frac{1}{32}\delta[k_r]$$


$$\sum_{m=0}^{7}\delta[c-4m] \quad \overset{\text{DFT}}{\Longrightarrow} \quad \frac{1}{32}\delta[k_r]\sum_{m=0}^{7}e^{-j\frac{2\pi k_c}{C}4m}$$

$$= \frac{1}{32}\delta[k_r]\sum_{m=0}^{7}e^{-j\frac{2\pi k_c}{8}m} = \frac{1}{4}\delta[k_r]\delta[k_c \bmod 8]$$

Simple Shapes

Find the 2D DFT of the following image.

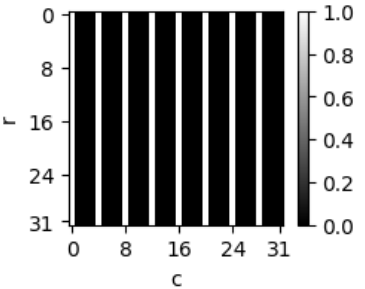

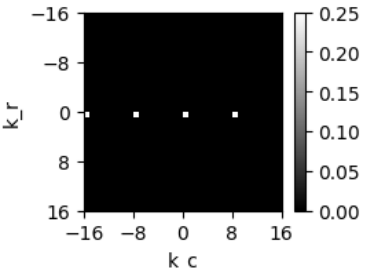

What's the relation between the period in space (left) and the period in frequency (right)?