

Name:

Kerberos (Athena) username:

Please WAIT until we tell you to begin.

This quiz is closed book, but you may use two 8.5×11 sheets of notes (four sides).

You may **NOT** use any electronic devices (such as calculators and phones).

If you have questions, please **come to us** at the front of the room to ask.

Please enter all solutions in the boxes provided.

Work on other pages with QR codes will be considered for partial credit.

Please provide a note if you continue work on worksheets at the end of the exam.

Please do not write on the QR codes at the bottom of each page.

We use those codes to identify which pages belong to each student.

Trigonometric Identities Reference

$$\cos(a+b) = \cos(a)\cos(b) - \sin(a)\sin(b)$$

$$\sin(a+b) = \sin(a)\cos(b) + \cos(a)\sin(b)$$

$$\cos(a) + \cos(b) = 2\cos\left(\frac{a+b}{2}\right)\cos\left(\frac{a-b}{2}\right)$$

$$\sin(a) + \sin(b) = 2\sin\left(\frac{a+b}{2}\right)\cos\left(\frac{a-b}{2}\right)$$

$$\cos(a+b) + \cos(a-b) = 2\cos(a)\cos(b)$$

$$\sin(a+b) + \sin(a-b) = 2\sin(a)\cos(b)$$

$$2\cos(a)\cos(b) = \cos(a-b) + \cos(a+b)$$

$$2\sin(a)\cos(b) = \sin(a+b) + \sin(a-b)$$

$$\cos(a-b) = \cos(a)\cos(b) + \sin(a)\sin(b)$$

$$\sin(a-b) = \sin(a)\cos(b) - \cos(a)\sin(b)$$

$$\cos(a) - \cos(b) = -2\sin\left(\frac{a+b}{2}\right)\sin\left(\frac{a-b}{2}\right)$$

$$\sin(a) - \sin(b) = 2\cos\left(\frac{a+b}{2}\right)\sin\left(\frac{a-b}{2}\right)$$

$$\cos(a+b) - \cos(a-b) = -2\sin(a)\sin(b)$$


$$\sin(a+b) - \sin(a-b) = 2\cos(a)\sin(b)$$

$$2\sin(a)\sin(b) = \cos(a-b) - \cos(a+b)$$

$$2\cos(a)\sin(b) = \sin(a+b) - \sin(a-b)$$

1 System Identification (20 points)

Part a. Two linear, time-invariant, continuous-time systems, S_1 and S_2 are connected so that the output of S_1 is the input to S_2 as shown in the following figure.

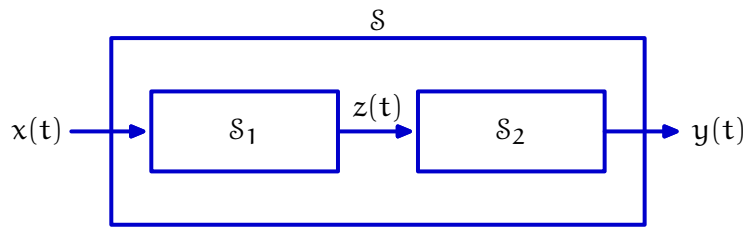

The impulse response of S_1 is

$$h_1(t) = e^{-t}u(t)$$

and the impulse response of S_2 is

$$h_2(t) = e^{-2t}u(t)$$

where $u(t)$ represents the unit-step function:

$$u(t) = \begin{cases} 1 & \text{if } t \geq 0 \\ 0 & \text{otherwise} \end{cases}$$

Find a differential equation of the form

$$a_0y(t) + a_1y'(t) + a_2y''(t) + \dots = b_0x(t) + b_1x'(t) + b_2x''(t) + \dots$$

to relate $x(t)$ and $y(t)$, where a_0, a_1, a_2, \dots and b_0, b_1, b_2, \dots represent constants, primes represent derivatives, double primes represent double derivatives, and the ellipses represent higher order terms.

Note that your answer should not contain any $z(t)$ terms.

Enter your differential equation in the box below.

Part b. Consider a linear, time-invariant, discrete-time system with the unit-sample response $h[n]$ given below:

$$h[n] = \sum_{i=0}^{\infty} \alpha^i \delta[n-4i]$$

where $0 < \alpha < 1$.

Determine a difference equation to relate the input $x[n]$ and output $y[n]$ of this system.

Enter your difference equation in the box below.

Note: Your solution does not have to be closed-form to receive full credit.

2 Convolutions (27 points)

Part a. Let f_1 represent the following signal:

$$f_1[n] = \begin{cases} (-1)^n & \text{if } 0 \leq n < 6 \\ 0 & \text{otherwise} \end{cases}$$

and let f_2 represent the signal that results when f_1 is convolved with itself:

$$f_2[n] = (f_1 * f_1)[n]$$

Determine the first 15 samples of f_2 and enter their values in the boxes below.

$f_2[0]$:

$f_2[5]$:

$f_2[10]$:

$f_2[1]$:

$f_2[6]$:

$f_2[11]$:

$f_2[2]$:

$f_2[7]$:

$f_2[12]$:

$f_2[3]$:

$f_2[8]$:

$f_2[13]$:

$f_2[4]$:

$f_2[9]$:

$f_2[14]$:

Part b. Let g_1 represent a signal whose even-numbered samples are 1 and whose odd-numbered samples are zero. Let g_2 represent the signal that would result from the following procedure:

- use an analysis width $N = 6$ (i.e., $0 \leq n < 6$) to calculate the DFT G_1 of g_1 ,
- let $G_2[k] = G_1^2[k]$, and
- take the inverse DFT of G_2 and multiply by $N = 6$ to find g_2 .

Determine $g_2[0]$ through $g_2[5]$ and enter their values in the boxes below.

$g_2[0]$:

$g_2[1]$:

$g_2[2]$:

$g_2[3]$:

$g_2[4]$:

$g_2[5]$:

3 DFTs of Sinusoids (32 points)

Each of the following eight signals ($x_0[n]$ through $x_7[n]$) are defined by functions of discrete time n .

$$x_0[n] = \cos(9\pi n/32): \quad \boxed{}$$

$$x_4[n] = \cos(2\pi n/5): \quad \boxed{}$$

$$x_1[n] = \cos(9\pi n/16): \quad \boxed{}$$

$$x_5[n] = |\cos(9\pi n/32)|: \quad \boxed{}$$












$$x_2[n] = \cos(9\pi n/26): \quad \boxed{}$$

$$x_6[n] = \cos^2(9\pi n/32): \quad \boxed{}$$

$$x_3[n] = \cos(9\pi n/36): \quad \boxed{}$$

$$x_7[n] = \cos^3(9\pi n/32): \quad \boxed{}$$

Discrete Fourier Transforms (DFTs) of length $N = 32$ are computed for each of these signals. Identify which of the plots below shows the magnitude of each of these DFTs as a function of frequency index k . Then write the letter of that plot in the corresponding box above.

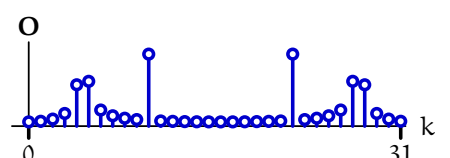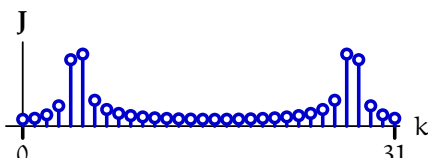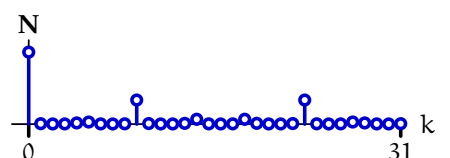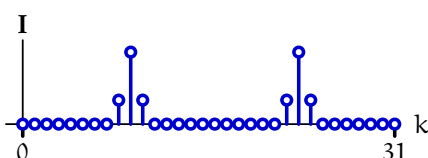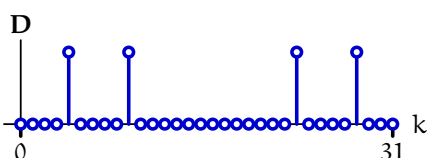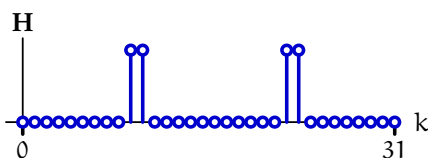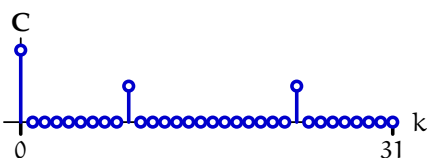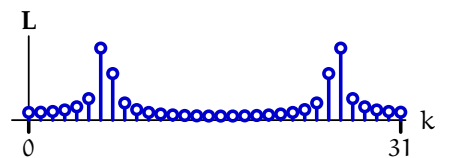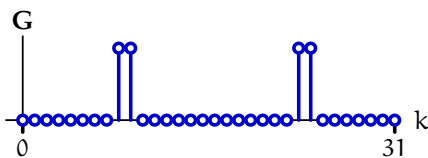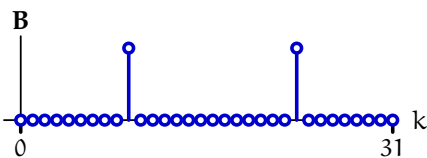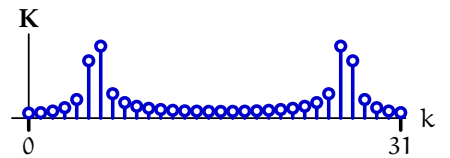


The vertical scales for these plots differ. Each has been normalized so that its peak magnitude is 1.

Worksheet (intentionally blank)

4 Related DFTs (40 points)

Let $f[n]$ represent a periodic, discrete-time signal with period $N=30$ so that $f[n] = f[n+30]$ for all n . The following plots show one period of $f[n]$ along with the magnitude and angle of its Discrete Fourier Transform (DFT) computed with an analysis window of length $N=30$. The magnitude plot has been scaled so that the maximum magnitude is 1.

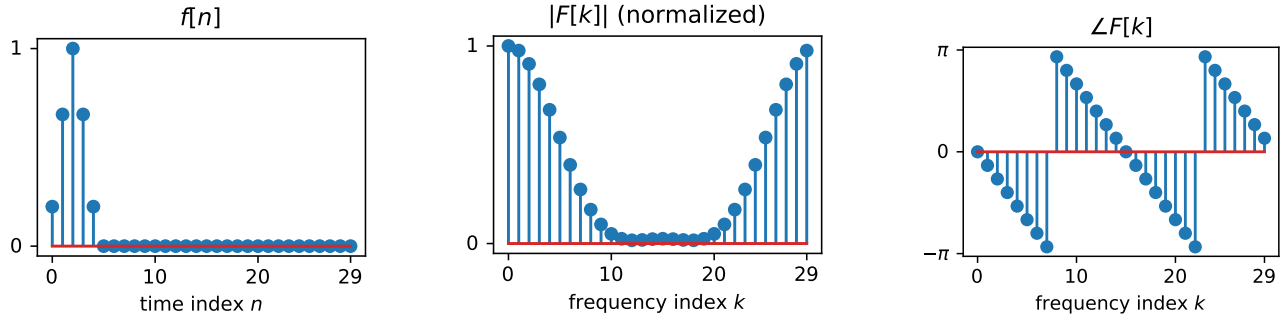

Five signals ($g_1[n]$ through $g_5[n]$) are derived from $f[n]$ as shown below.











	normalized magnitude	angle
$g_1[n] = f[-n]$	<input type="text"/>	<input type="text"/>
$g_2[n] = f[n-1]$	<input type="text"/>	<input type="text"/>
$g_3[n] = f[n+1]$	<input type="text"/>	<input type="text"/>
$g_4[n] = f^2[n]$	<input type="text"/>	<input type="text"/>
$g_5[n] = \begin{cases} f[n/2] & \text{if } n \text{ is even} \\ 0 & \text{otherwise} \end{cases}$	<input type="text"/>	<input type="text"/>

Determine which of the panels (A-J) on the following page shows the magnitude of the DFT of each of the derived signals and write the letter for that panel in the corresponding box in the magnitude column above.











Similarly, determine which of the panels (a-j) on the subsequent page shows the angle of the DFT of each of the derived signals and write the letter for that panel in the corresponding box in the angle column above.

The same panel may be used more than once.

Magnitude Plots for Problem 4: the magnitudes in each plot have been scaled so that the largest magnitude in each plot is 1.

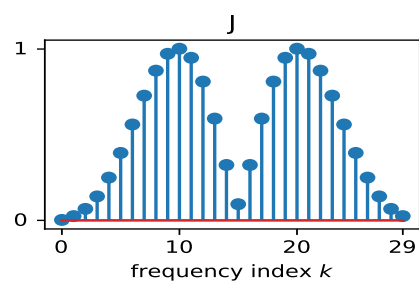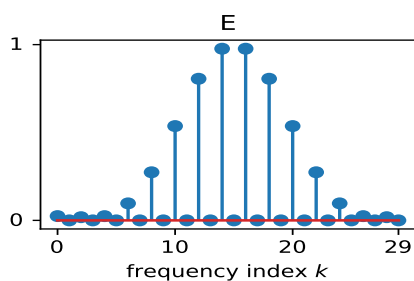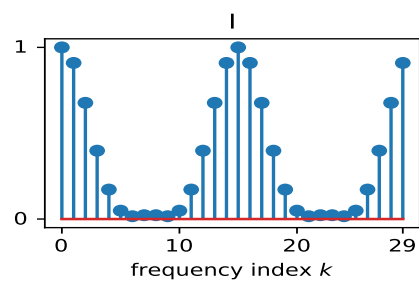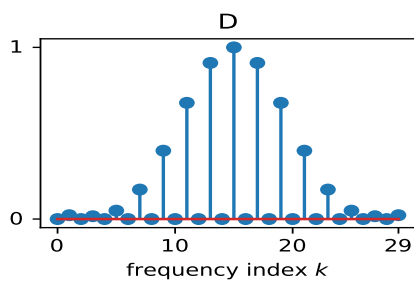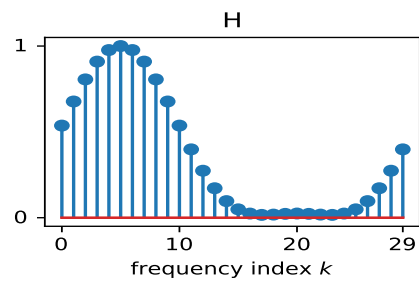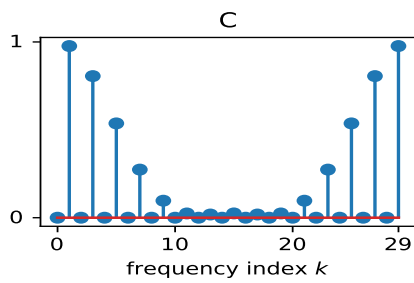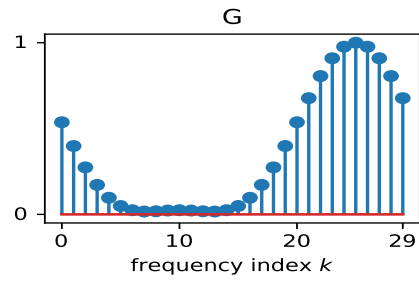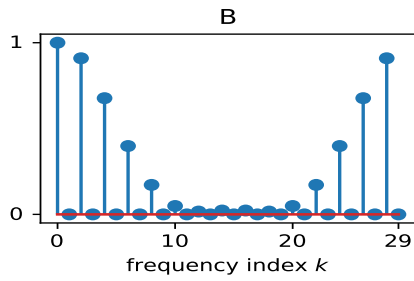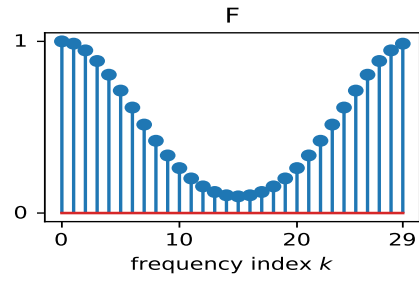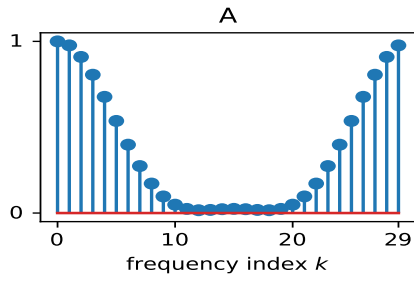

Angle Plots for Problem 4.

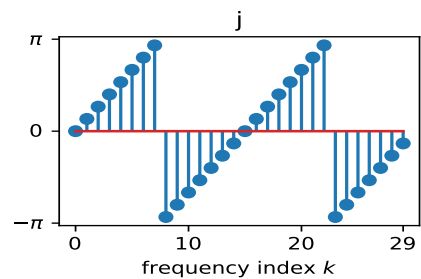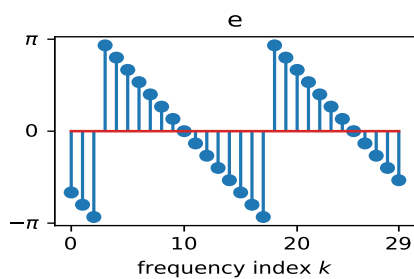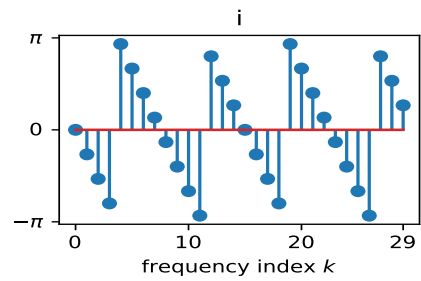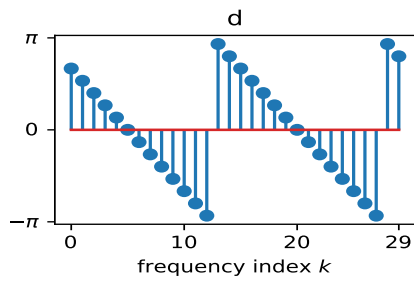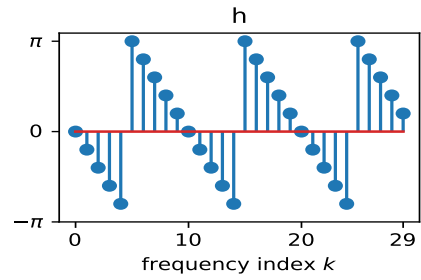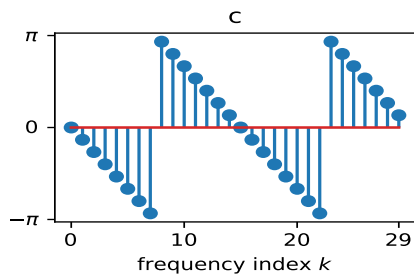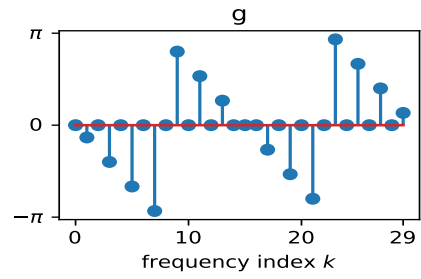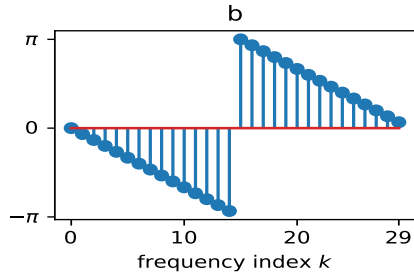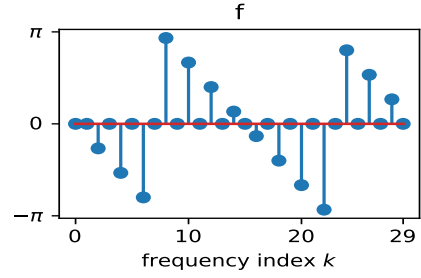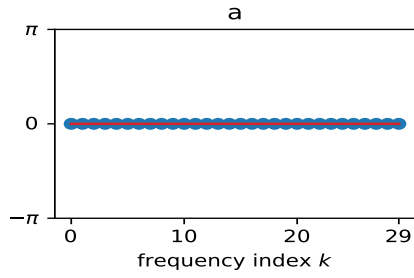

Worksheet (intentionally blank)

Worksheet (intentionally blank)

Worksheet (intentionally blank)

Worksheet (intentionally blank)